


## FLANGE SPECIFICATIONS

Working pressure is applicable within the temperature range -10°C to 120°C

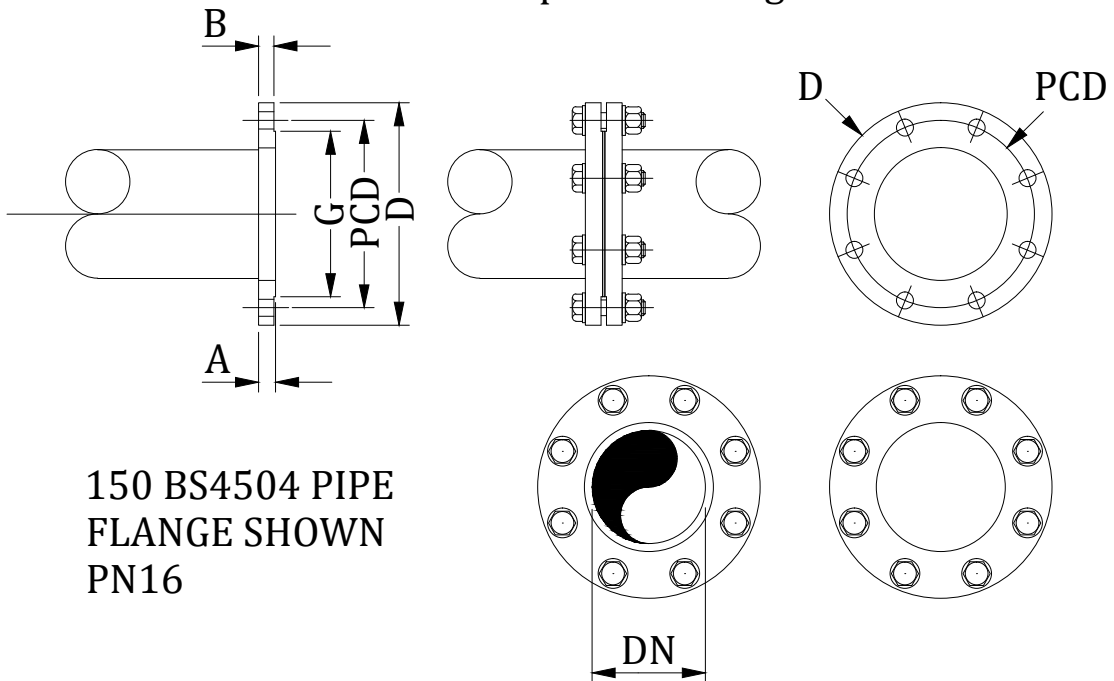

150 BS4504 PIPE  
FLANGE SHOWN  
PN16

DN	D	G	A	B	PCD	Holes	Dia	Bolts
50	165	98	19	16	125	4	19	M16x65
80	200	132	19	16	160	8	19	M16x65
100	220	156	19	16	180	8	19	M16x65
150	285	211	19	16	240	8	23	M20x70
200	340	266	20	17	295	12	23	M20x70
250	400	319	22	19	355	12	28	M24x85
300	455	370	25	21	410	12	28	M24x85

PN16 flanges are supplied for working pressures up to and including 16 bar

Bolts are supplied galvanised to BS 4190

Gaskets are supplied EPDM to BS 2494